

## OPTIMIZATION OF THE SELF-BIOREMEDIATION PROCEDURE OF INDUSTRIAL CORK WASTEWATERS AND PRELIMINARY ASSESSMENT OF THE TOXICITY OF THE FINAL RESIDUE

**Karina I. Paredes-Páliz**

Email: [karina.paredes@unach.edu.ec](mailto:karina.paredes@unach.edu.ec)

ORCID: <https://orcid.org/0000-0002-5474-2566>

**Eloísa Pajuelo<sup>2</sup>**

Email: [epajuelo@us.es](mailto:epajuelo@us.es)

**Anabell Urbina-Salazar<sup>3</sup>**

Email: [adurbina@espe.edu.ec](mailto:adurbina@espe.edu.ec)

**Alberto Renato Inca-Torres<sup>3</sup>**

Email: [arinca@espe.edu.ec](mailto:arinca@espe.edu.ec)

<sup>1</sup> Grupo de Investigación en Estudios Interdisciplinarios, Facultad de Ciencias de la Salud, Universidad Nacional de Chimborazo, Av. Antonio José de Sucre, Km. 1 ½, vía Guano, Riobamba-Ecuador.

<sup>2</sup> Departamento de Microbiología y Parasitología, Facultad de Farmacia, Universidad de Sevilla, c/Profesor García González, 2, 41012 Sevilla-España.

<sup>3</sup> Departamento de Ciencias de la Vida y de la Agricultura, Universidad de las Fuerzas Armadas ESPE, Av. Gral.Rumiñahui s/n, Sangolquí P.O. BOX 171-5-231B, Ecuador.

correspondence author: Karina I. Paredes-Páliz<sup>1</sup> Email: [karina.paredes@unach.edu.ec](mailto:karina.paredes@unach.edu.ec)

**Abstract.** Cork-boiling wastewaters are rich in phenolic compounds and have traditionally been remediated by chemical techniques. An alternative treatment, based on microbial bioremediation, is being developed. The objective of this work was to design and optimize an effective self-bioremediation system to treat polluted cork wastewater. Polyphenol tolerant cultivable bacteria were isolated from this effluent. The strains, identified by 16S rDNA, include *Acinetobacter* sp., *Staphylococcus* sp., two *Microbacterium* spp. and *Bacillus* sp., that were able to tolerate up to 15mM of phenol, and up to 1mM and 0.1mM of 4-chlorophenol and 2,4-dichlorophenol, respectively, using the pollutant as the sole carbon source. Degradation assays were performed using *Acinetobacter* sp. and the consortium formed by the five selected strains immobilized onto residual cork particles. Addition of low levels of carbon, together with micromolar concentrations of H<sub>2</sub>O<sub>2</sub> in the presence of light were the optimal conditions for phenol removal. Under these conditions, the consortium was able to degrade more than 60% of initial phenol from cork wastewater in 10 days. The post-removal solution was tested for its toxicity applying a toxicity test based on the germination of *Medicago sativa* seeds. Results suggested that

the treated solution was less toxic than the parent solution. Thus, self-bioremediation seems to be a promising eco-friendly technology that allows the treatment of cork boiling wastewater with low costs and the absence of collateral impacts.

**Keywords:** Phenol, Chlorophenol, Bacteria, Biofilms, Cork, Wastewaters, Bioremediation.

## 1 Introduction

The accelerated growth of chemical and oil industries is accompanied by the release of dangerous wastes, which have negative consequences for ecosystems and public health. These compounds are disposed indiscriminately in the environment and can often remain in it for long periods of time [1, 2, 3].

Phenolic compounds require relevant attention in the study of environmental contamination due to their toxicity and prevalence in water and soil [4, 5]. In nature, these contaminants are generated by processes of humification and degradation of proteins, as well as burning of forests [6]. However, the greatest amount of phenolic compounds is released into the environment from industrial activity, since they are widely used in the pharmaceutical industry, paper production, plastics, textiles and oil refining, among others [7].

The removal of phenolic compounds from industrial effluents before being discharged into the environment is compulsory and different alternatives have been sought for the treatment of these contaminants [8, 9]. Bioremediation allows microorganisms to transform or degrade dangerous compounds found in water and soil and represents an environmentally friendly alternative, being a tool widely used by international organizations such as EPA [Environmental Protection Agency] for the treatment of this type of waste, since it is less expensive and is relatively simple [10, 11]. The application of microbial consortia for bioremediation processes is considered beneficial because it has some advantages over pure cultures [12,13]. However, it is necessary to work with composite native microbial communities, since they can perform a complete mineralization of phenols, transforming them to carbon dioxide [CO<sub>2</sub>] and water [H<sub>2</sub>O] without any toxic residue [14, 15]. Another advantage of working with microbial consortia is to maintain stability in the bacterial culture, thus increasing their metabolic capacity [16, 17].

Cork industry is one of the most important ones in Portugal and Southern Spain, being these two countries the world first and second producers respectively [18]. Cork treatment involves boiling the cork plates in water. After this treatment, the resulting wastewater is a residue that contains high concentration of polyphenols, chlorophenols and tannins [19], whose depuration is performed basically by physicochemical methods including flocculation and precipitation, ozonation, membrane filtration, photo-oxidation, etc. [20]. In the last years, increasing publications describe the depuration of this residue by biological treatments using fungi [21, 22] and particularly bacteria, one or in combination with partial chemical degradation [23]. One of the most novel approaches included immobilization of [chloro]phenol-degrading bacteria isolated from the wastewaters onto residual cork particles in order to increase the durability and effectivity of bioremediation, a process called self-bioremediation [24, 25].

In this work, some steps further are taken in the process of self-bioremediation: a) The use of bacterial consortia in the place of individual bacterial strains has been investigated; b) The incubation conditions as well as the use of additives have been optimized to get an optimal removal of phenolics in cork wastewater, and c) Finally, by means of a phytotoxicity test, the quality of the treated water was evaluated.

## **2 Materials and Methods**

### **2.1 Isolation and characterization of bacterial strains**

Bacterial strains were isolated from cork-boiling wastewater. Water samples were provided by a local company and enriched with TSB medium in a 9:1 proportion [9 volumes of waterwaters: 1 volume of TSB]. The enriched wastewater was incubated for 48 h at 28° with continuous shaking and after that period the bacteria were isolated on TSA medium. Bacterial identification was made by 16S rDNA sequencing.

### **2.2 Resistance of isolated strains towards phenol and chlorophenols**

The resistance of the isolates to phenol and chlorophenols was determined in solid minimal medium [26, 27] supplemented with a minimum concentration of TSA equivalent to 10% [v/v] to provide a minimum carbohydrate dose. Different concentrations of phenolics were added to this medium: phenol [0-25 mM], chlorophenol [0-2 mM] or 2, 4-dichlorophenol [0-1 mM]. After incubating the plates at 28° C for 72-96 h, the growth was evaluated. The resistance was expressed as the maximum tolerable concentration [MTC] which is the maximum concentration of the toxic not affecting bacterial growth.

### **2.3. Determination of phenol/polyphenols in liquid media**

The determination of phenol was done by a colorimetric method [28]. Reagents were added in the following order: 700 µL 0.25 mM NaHCO<sub>3</sub>, 100 µL of the sample [supernatant of the cultures after centrifuging at 10,000rpm for 5 min], 100 µL 20 mM 4-AAP [4-aminoantipyrine] and 100 µL 80 mM potassium ferricyanide. After 5 min, the OD at 510 nm was measured and the phenol concentration was determined from a standard curve made with a stock solution of 1,000 µg phenol. mL<sup>-1</sup>.

Since wastewaters contained a mix of phenolics, in order to evaluate the removal of total polyphenols in this residue, several calibration curves were performed using different phenolic compounds [phenol, tannic acid and caffeic acid]. The concentration of polyphenols in wastewater samples was then calculated as the mean of the concentrations obtained by using the different calibration curves corresponding to every substance.

## 2.4. Phenol Degradation

### 2.4.1. Degradation of phenol in aqueous solution

Bacteria were grown in flasks containing 25 mL of minimal medium [26] supplemented with TSB [10% v/v] and phenol [2.5 mM] at 28° C with constant shaking at 200 rpm. The amount of inoculum for each strain was 100 µL of an overnight culture [about 10<sup>8</sup> CFU/mL] of the bacterial strains cultivated in the same conditions, i.e., in the presence of 0.1 mM phenol for induction of the degradation machinery. Aliquots of 2 mL were taken for a total period of 48 h. The OD at 600 nm was determined as a measure of bacterial growth. The aliquots were centrifuged at 10,000 rpm for 5 minutes and the phenol concentration was determined in the supernatant as described in section 2.3 [28].

### 2.4.2. Optimization of the conditions for phenol biodegradation

The conditions for optimal degradation of phenolic compounds were optimized, in particular: a] the optimal amount of additional carbon source in the form of TSB; b] the optimal amount of H<sub>2</sub>O<sub>2</sub>; c] optimal temperature; d] shaking/static cultures; and e] the presence of light/dark. In all cases, the corresponding controls without bacteria were performed in parallel. After 72h incubation, the amount of total polyphenols was determined as previously described in section 2.4.1 [28].

## 2.5 Degradation of phenol by consortia of bacteria

Once the best phenol degradation conditions were established, the possibility of improved degradation with bacterial consortia was tested. In these consortia, the strain BAE9A -which was the best degrader- was always included. Besides, different combinations were tested. Cultures of each of the bacteria were grown individually overnight in tubes of 5 mL containing minimal medium [26] supplemented with 10% [v:v] TSB and 2.5 mM phenol in order to induce phenol degrading enzymes. Next morning, the OD at 600nm of the cultures was determined and adjusted 1.0 with sterile minimal medium. Flasks containing 25 mL of minimal medium [26] supplemented with TSB [10% v/v] and phenol [2.5 mM] were inoculated with 1mL of the overnight grown cultures. When using bacterial consortia, the volume was divided for the number of strains [previously adjusted to the same optical density].

## 2.6 The flasks were incubated for 72 h at 28° C with shaking at 200 rpm. At the end of the experiment, the cultures were centrifuged at 10,000 rpm for 5 minutes and the phenol concentration was determined in the supernatant as described in section 2.3. 2.6. Degradation of phenol by bacteria immobilized onto cork particles

Cork particles – a residue collected from the floor of the cork industry- were homogenized with a coffee grinder, passed through a 0.5 mm sieve, washed with 25 mL HCl [1mM] for 10 min and the pH was neutralized with an appropriate volume of NaOH [1mM]. Subsequently, 5 washes with

sterile distilled water were performed. Particles were sterilized in autoclave and air dried. Cork particles [approx. 0.01 g] were mixed with 850  $\mu\text{L}$  of minimal media, 100  $\mu\text{L}$  of TSB medium [10% v:v with regard to final volume] and 150  $\mu\text{L}$  of phenol [1mM] and inoculated with 60  $\mu\text{L}$  of a bacterial inoculum [an overnight culture of bacteria grown in TSB medium, approx.  $10^8$  CFU/mL] in an eppendorf tube. A control without bacteria was performed along. The tubes were incubated at 28° C under constant shaking at 100 rpm for 10 days in order to allow the formation of a mature biofilm. After this time the cork particles were washed 5 times with sterile distilled water and passed through a sieve. The supernatant was centrifuged at 10,000 rpm for 15 min to avoid interferences in the determination of phenol by the colorimetric method [28]. Cork particles were used for microscopy studies. For that, the particles were fixed overnight in the presence of  $\text{OsO}_4$  and subsequently treated with Au and visualized by SEM using a scanning electron microscope Jeol 6460LV [24].

## 2.6. Toxicity assays based on germination of *Medicago sativa* seeds

The phytotoxicity of solutions after the removal process was evaluated and compared to that of the original wastewater. For that, a test based on the germination of alfalfa seeds was performed. Sterile water was used as external control of the germinating capacity of the seeds. Alfalfa seeds were previously sterilized with several washes of a 0.001% v/v HCl solution and washed with distilled water. The assay was performed with 4 replications of n=25 seeds with for each treatment [total seeds n = 100] in Petri dishes with a diameter of 90 mm. To sterilize the wastewaters, both the original residue and the post-treatment residue, the solutions were filtered through 0.45  $\mu\text{m}$  filters [sterilization by autoclaving was avoided in order not to alter the composition of the solutions]. 3 mL of the solutions to be evaluated [sterile distilled water, sterilized original wastewater or sterilized post-treated wastewater] were placed in the bottom of the plate and groups of 25 previously sterilized seeds [4 plates= 100 seeds] were carefully placed on each plate with the aid of a clamp. Plates were protected from light and incubated for 5 days at  $25 \pm 2^\circ \text{C}$ . After this period, the number of germinated seeds was recorded, considering the visible appearance of the radicle as the germination criterion.

## 3 Results

### 3.1. Identification of bacteria from cork-processing wastewaters

In a previous work [del Castillo et al., 2012], the strains BAE9A and BAC4 were previously selected for bioremediation of cork wastewater based on the results obtained from phenol resistance and degradation rate, as well as the ability to form "biofilms" on the cork surface [del Castillo et al., 2012]. In addition, in this work three new strains [VR1, VR2 and VR3 VN1, VH1 and VH2] were selected since they also displayed good phenol degrading properties and they were included in the study.

Gram staining revealed that the bacteria corresponded to one gram-negative rod [BAE9A], three gram-positive rods [VR1, VR2 and VR3 VN1, VH1 and VH2] and one Gram positive coccus [BAC4]. The results of 16S rDNA sequencing and comparison of the obtained sequences with databases [Ez-Taxon, RDP, BLAST] indicated that BAE9A corresponded to *Acinetobacter soli*; VR1 and VR2 belonged to the genus *Microbacterium*, in particular *M. oxydans* and *M. hydrocarbonoxydans* respectively; whereas VR3 was identified as *Bacillus weihenstephanensis* and BAC4 was ascribed to the species *Staphylococcus saprophyticus* [Table 1].

**Table 1.** Identification and tolerance against phenolic compounds of isolated strains

### 3.2. Resistance of bacterial strains to phenol and chlorophenols in solid medium

The resistance of the strains to phenol, 4-chlorophenol and 2, 4-dichlorophenol was tested on plates containing minimal medium supplemented with 10% [v:v] TSA and the contaminants. BAE9A, BAC4, VR2 and VR3 strains showed the highest resistance to phenol [15 mM], whereas VR1 was

STRAIN	Maximun identity [ 16S rDNA]	MTC [mM]		
		Phenol	4-Chlorophenol	2,4 dichlorofenol
<b>BAE9A</b>	<i>Acinetobacter soli</i> 99%	15 mM	1 mM	<0.1 mM
<b>BAC4</b>	<i>Staphylococcus saprophyticus</i> 99%	15 mM	0.5 mM	<0.1 mM
<b>VR1</b>	<i>Microbacterium oxydans</i> 99%	10 mM	0.5 mM	<0.1 mM
<b>VR2</b>	<i>Microbacterium hydrocarbonoxydans</i> 99%	15 mM	0.5 mM	<0.1 mM
<b>VR3</b>	<i>Bacillus weihenstephanensis</i> 98%	15 mM	0.5 mM	<0.1 mM

able to tolerate up to 10 mM phenol. BAE9A strain showed the highest resistance to 4-chlorophenol [1mM]. None of the strains was able to tolerate concentrations of 2, 4-dichlorophenol above 0.1 mM [Table. 1 and Fig. 1].

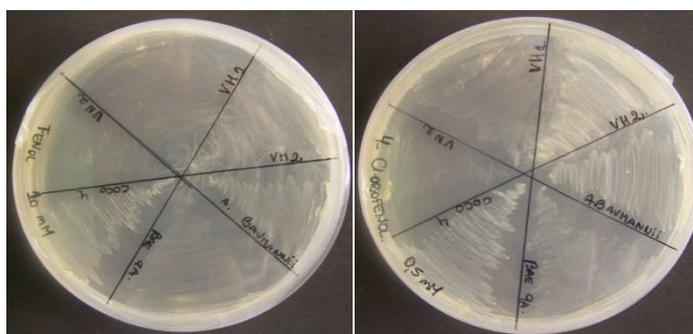


Fig. 1. Plaques of different bacterial strains resistant to 10 mM phenol and 0.5 mM 4-chlorophenol.

### 3.3. Evaluation of phenol removal by individual strains in liquid medium

The strains were grown in minimal medium supplemented with 10% TSB medium and containing 2.5 mM phenol.  $DO_{600\text{ nm}}$  was measured as a bacterial growth parameter. The disappearance of phenol in the culture medium was evaluated. The ability to grow with phenol varied among strains. The strains that showed the fastest growth rate in the presence of phenol were BAE9A and VR3. The remaining strains [BAC4, VR1 and VR2] showed a growth retardation of approximately 4h. Although all strains showed good phenol degradation abilities, BAE9A and BAC4 strains appear to be the most efficient phenol degraders, since the remaining percentage of phenol in the medium was the lowest [see Fig. 2].

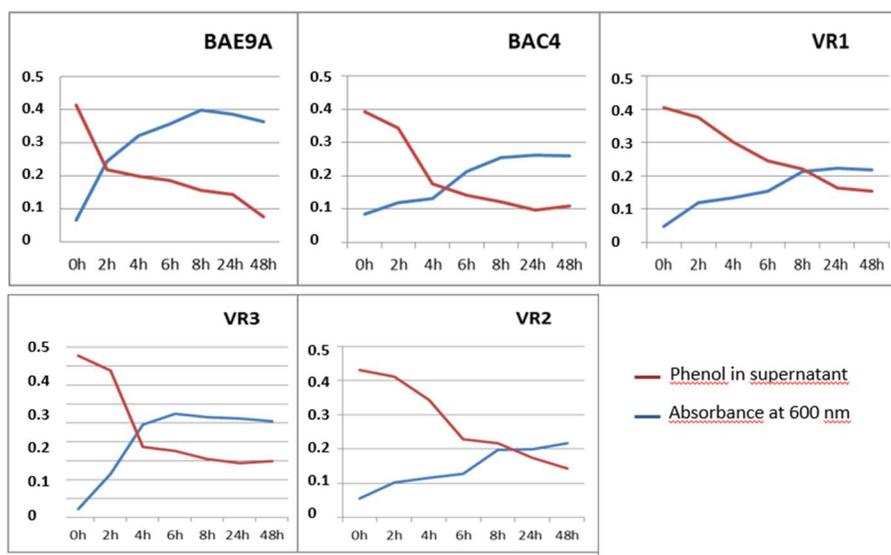


Fig. 2. Growth and consumption of phenol by bacterial strains isolated from cork-processing wastewaters in presence of 2.5 mM phenol. Bacterial strains were grown in 1/10 TSB medium supplemented with 2.5mM phenol. Bacterial growth [OD at 600nm] and phenol in the supernatant of the cultures were evaluated for a total period of 48 hours.

### 3.4. Optimization of conditions for phenol degradation by *Acinetobacter soli* BAE9A

Different conditions were tested in order to evaluate the phenol consumption in liquid medium when consortia are formed. The conditions evaluated are shown in Table 2.


**Table 2.** Evaluated treatments in minimal medium supplemented with 2,5 mM of phenol

**\*Bacterial strains selected**

**3.5. Phenol removal by bacterial consortia: optimization of variables**

In bacterial consortia, BAE9A was used as the main strain because of its high rate of phenol degradation [Hernández, 2011; Del Castillo et al., 2012]. Besides, other bacteria were used in combination with BAE9A. The consortium formed by the five strains: BAE9A, BAC4, VR1, VR2 and VR3 showed the lowest percentage of residual phenol [18.8%], followed by the strain BAE9A [22.4%] cultured alone. The remaining conditions showed a percentage of residual phenol between 30 and 40% [Figure 3].

TREATMENTS	MM	PHENOL	BAE9A*	BAC4*	VR1*	VR2*	VR3*
<b>CONTROL</b>	+	+	-	-	-	-	-
<b>T1</b>	+	+	+	-	-	-	-
<b>T2</b>	+	+	+	+	-	-	-
<b>T3</b>	+	+	+	-	+	-	-
<b>T4</b>	+	+	+	-	-	+	-
<b>T5</b>	+	+	+	-	-	-	+
<b>T6</b>	+	+	+	+	+	+	+

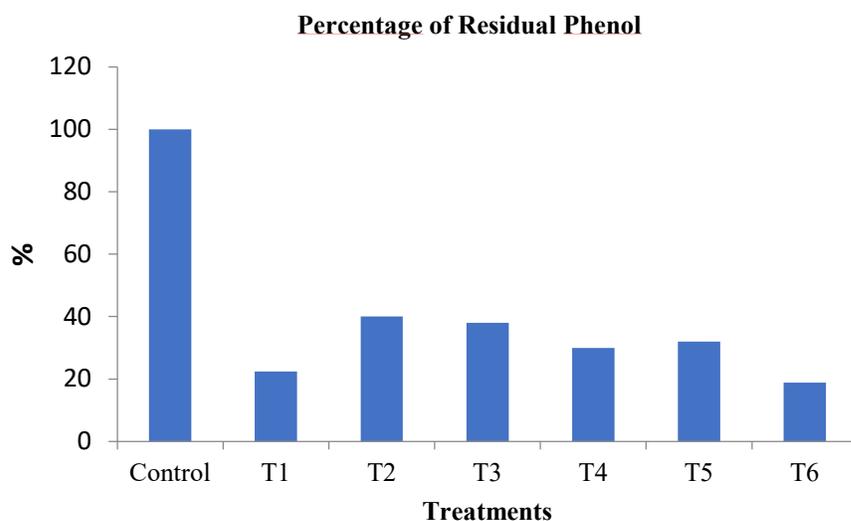

**Fig. 3.** Percentage of Residual Phenol in liquid medium. The treatments evaluated are shown in Table 2.

### 3.6. Polyphenols removal from cork-boiling wastewater [bacterial consortium]

The conditions evaluated in this assay are showed in Table 3. Treatment with BAE9A strain alone showed the highest degradation of total polyphenols, with a percentage of removal of 70.66% [total polyphenols remaining 12.94 mg/L].


**Table 3.** Evaluated treatments in cork-boiling wastewater supplemented with TSB [10% v/v] and H<sub>2</sub>O<sub>2</sub> [0.01% v/v]

TREATMENT S	WASTEWATER [WW]	TS B	H <sub>2</sub> O <sub>2</sub>	BAE9A *	BAC4 *	VR1 *	VR2 *	VR3 *
CONTROL	+	+	+	-	-	-	-	-
T1	+	+	+	+	-	-	-	-
T2	+	+	+	+	+	-	-	-
T3	+	+	+	+	-	+	-	-

<b>T4</b>	+	+	+	+	-	-	+	-
<b>T5</b>	+	+	+	+	-	-	-	+
<b>T6</b>	+	+	+	+	+	+	+	+

**\*Bacterial strains selected**

All bacterial consortium tested showed a significant removal of polyphenols in cork water samples; however, the most effective bacterial consortia in the removal of polyphenols were the consortium formed by all strains [BAE9A, BAC4, VR1, VR2 and VR3] with a 63.5% removal percentage [total remaining polyphenols 16.09 mg/L], followed by the consortium formed by the BAE9A/BAC4 strain, with a 60.8% removal percentage [total polyphenols remaining 17.28 mg/L] [see Fig. 4]. The addition of H<sub>2</sub>O<sub>2</sub> decreases color, improving the appearance for possible future uses [see Fig. 5].

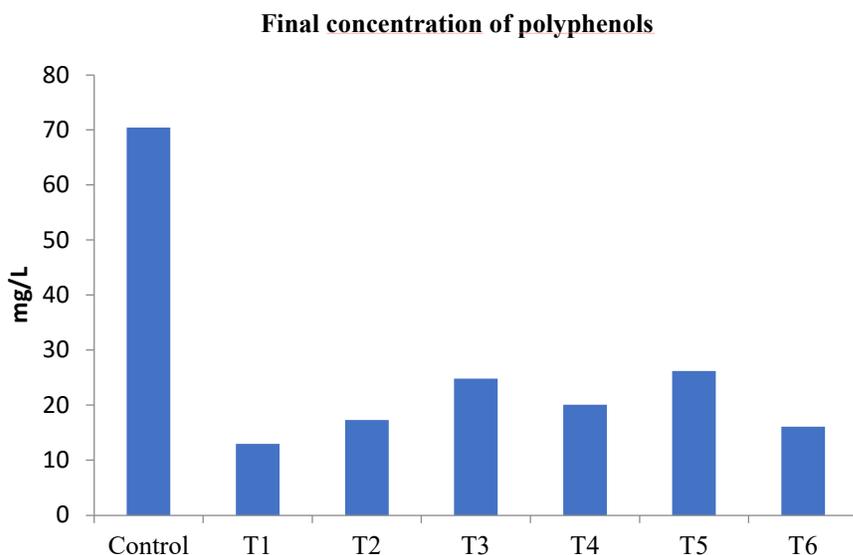


**Fig. 4.** Concentration of total polyphenols remaining in cork processing wastewater after 10 days of treatment



**Fig. 5.** Cork processing wastewater before and after the treatment with bacterial consortium.

### 3.7. Formation of "biofilms" onto cork particles

In the cork manufacturing process, small residual particles are released, which can serve as adhesion surfaces for the formation of biofilms. The formation of biofilms on the surface of cork particles was evaluated. The formation of biofilms was observed by SEM. It was observed on the cork particles, the presence of several bacterial morphologies corresponding to the strains that formed part of the consortium. It is clearly seen that the strains BAE9A, BAC4 and VR2 are able to colonize and grow on the surface of particles of residual cork, with a very high surface cover [see Fig. 6].

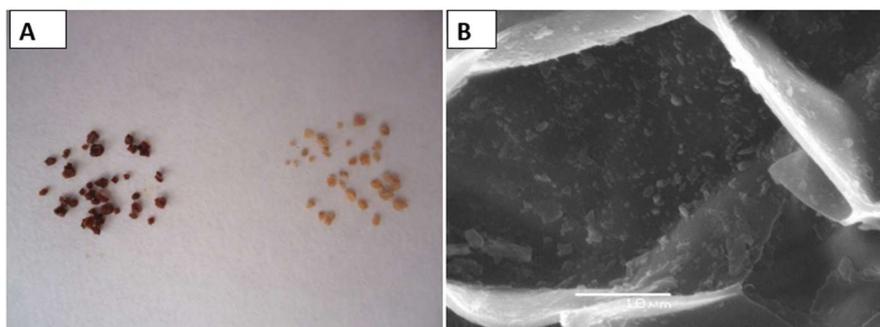

**Fig. 6.** Evaluation of biofilms formation on the surface of cork particles. A. Cork particles before and after the incubation with de bacterial consortium [BAE9A, BAC4, VR1, VR2 y VR3]. B. Scanning electron micrograph of a cork particle colonized by the bacterial consortium. Notice the different bacterial morphologies [cocci and rods of different sizes].

## References

1. Gavrilesco M, Demnerová K, Aamand J, Agathos S, Fava F. Emerging pollutants in the environment: present and future challenges in biomonitoring, ecological risks and bioremediation. *N Biotechnol* [Internet]. 2015;32(1):147–56. Disponible en: <https://www.sciencedirect.com/science/article/pii/S1871678414000028>
2. Reinmuth-Selzle K, Kampf CJ, Lucas K, Lang-Yona N, Fröhlich-Nowoisky J, Shiraiwa M, et al. Air pollution and climate change effects on allergies in the Anthropocene: Abundance, interaction, and modification of allergens and adjuvants. *Environ Sci Technol* [Internet]. 2017;51(8):4119–41. Disponible en: <http://dx.doi.org/10.1021/acs.est.6b04908>
3. Chowdhary P, Bharagava RN, Mishra S, Khan N. Role of industries in water scarcity and its adverse effects on environment and human health. En: *Environmental Concerns and Sustainable Development*. Singapore: Springer Singapore; 2020. p. 235–56
4. ATSDR. Agency for Toxic Substances and Disease Registry. 2008a. Public health statement. Phenol. CAS # 108-95-2. Department of Health and Human Services. Public Health Service. United States.
5. ATSDR. Agency for Toxic Substances and Disease Registry. 2008b. Toxicological Profile for Phenol. Department of Health and Human Services. Public Health Service. United States.
6. Wang S, Wang Y, He X, Lu Q. Degradation or humification: rethinking strategies to attenuate organic pollutants. *Trends Biotechnol* [Internet]. 2022; Disponible en: <https://www.sciencedirect.com/science/article/pii/S0167779922000622>
7. Soto-Hernández M, Tenango MP, García-Mateos R. Phenolic Compounds - Natural Sources, Importance and Applications. Soto-Hernández M, Palma-Tenango M, Garcia-Mateos M del R, editores. Londres, Inglaterra: InTech; 2017.
8. Babuponnusami A, Muthukumar K. A review on Fenton and improvements to the Fenton process for wastewater treatment. *J Environ Chem Eng* [Internet]. 2014;2(1):557–72. Disponible en: <https://www.sciencedirect.com/science/article/pii/S2213343713002030>
9. Raza W, Lee J, Raza N, Luo Y, Kim K-H, Yang J. Removal of phenolic compounds from industrial waste water based on membrane-based technologies. *J Ind Eng Chem* [Internet]. 2019;71:1–18. Disponible en: <https://www.sciencedirect.com/science/article/pii/S1226086X1831400X>
10. Pal Basak S, Sarkar P, Pal P. Isolation and characterization of phenol utilizing bacteria from industrial effluent-contaminated soil and kinetic evaluation of their biodegradation potential. *J Environ Sci Health A Tox Hazard Subst Environ Eng* [Internet]. 2014;49(1):67–77. Disponible en: <http://dx.doi.org/10.1080/10934529.2013.824304>
11. Kumar P, Ghosh Sachan S. Exploring microbes as bioremediation tools for the degradation of pesticides. En: Shah MP, editor. *Advanced Oxidation Processes for Effluent Treatment Plants*. Elsevier; 2021. p. 51–67.

12. Singh P, Jain R, Srivastava N, Borthakur A, Pal DB, Singh R, et al. Current and emerging trends in bioremediation of petrochemical waste: A review. *Crit Rev Environ Sci Technol* [Internet]. 2017;47(3):155–201. Disponible en: <http://dx.doi.org/10.1080/10643389.2017.1318616>
13. Kuanar A, Kabi SK, Rath M, Dhal NK, Bhuyan R, Das S, et al. A comparative review on bioremediation of chromium by bacterial, fungal, algal and microbial consortia. *Geomicrobiol J* [Internet]. 2022;1–16. Disponible en: <http://dx.doi.org/10.1080/01490451.2022.2035019>
14. Saravanan P, Pakshirajan K, Saha P. Kinetics of phenol and m-cresol biodegradation by an indigenous mixed microbial culture isolated from a sewage treatment plant. *J Environ Sci (China)* [Internet]. 2008;20(12):1508–13. Disponible en: <https://www.sciencedirect.com/science/article/pii/S1001074208625577>
15. Fuku K, Kanai H, Todoroki M, Mishima N, Akagi T, Kamegawa T, et al. Heterogeneous Fenton degradation of organic pollutants in water enhanced by combining iron-type layered double hydroxide and sulfate. *Chem Asian J* [Internet]. 2021;16(14):1887–92. Disponible en: <http://dx.doi.org/10.1002/asia.202100375>
16. Poi G, Aburto-Medina A, Mok PC, Ball AS, Shahsavari E. Bioremediation of phenol-contaminated industrial wastewater using a bacterial consortium—from laboratory to field. *Water Air Soil Pollut* [Internet]. 2017;228(3). Disponible en: <http://dx.doi.org/10.1007/s11270-017-3273-0>
17. El-Sheekh MM, Mahmoud YA-G. Technological approach of bioremediation using microbial tools: Bacteria, fungi, and algae. En: *Handbook of Research on Inventive Bioremediation Techniques*. Hershey, PA, Estados Unidos de América: IGI Global; 2017. p. 134–54.
18. Sierra-Pérez J, Boschmonart-Rives J, Gabarrell X. Production and trade analysis in the Iberian cork sector: Economic characterization of a forest industry. *Resour Conserv Recycl* [Internet]. 2015; 98:55–66. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0921344915000439>
19. Ponce-Robles L, Oller I, Polo-López MI, Rivas-Ibáñez G, Malato S. Microbiological evaluation of combined advanced chemical-biological oxidation technologies for the treatment of cork boiling wastewater. *Sci Total Environ* [Internet]. 2019;687:567–76. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0048969719323824>
20. Wu Z, Yuste-Córdoba FJ, Cintas P, Wu Z, Boffa L, Mantegna S, et al. Effects of ultrasonic and hydrodynamic cavitation on the treatment of cork wastewater by flocculation and Fenton processes. *Ultrason Sonochem* [Internet]. 2018;40:3–8. Disponible en: <https://www.sciencedirect.com/science/article/pii/S1350417717301803>
21. Mendonça E, Pereira P, Martins A, Anselmo AM. Fungal biodegradation and detoxification of cork boiling wastewaters. *Eng Life Sci* [Internet]. 2004;4(2):144–9. Disponible en: <http://dx.doi.org/10.1002/elsc.200420018>
22. Chen A, Li W, Zhang X, Shang C, Luo S, Cao R, et al. Biodegradation and detoxification of neonicotinoid insecticide thiamethoxam by white-rot fungus *Phanerochaete chrysosporium*. *J Hazard Mater* [Internet]. 2021;417(126017):126017. Disponible en: <https://www.sciencedirect.com/science/article/pii/S030438942100981X>

23. Marques IP, Gil L, La Cara F. Energetic and biochemical valorization of cork boiling wastewater by anaerobic digestion. *Biotechnol Biofuels* [Internet]. 2014;7(1):67. Disponible en: <http://dx.doi.org/10.1186/1754-6834-7-67>
24. Del Castillo I, Hernández P, Lafuente A, Rodríguez-Llorente ID, Caviedes MA, Pajuelo E. Self-bioremediation of cork-processing wastewaters by (chloro)phenol-degrading bacteria immobilised onto residual cork particles. *Water Res* [Internet]. 2012;46(6):1723–34. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0043135411008207>
25. Ibrahim AG, Al-Ghamdi LS. Bioremediation of phenol by mutated and immobilized *Aspergillus* and *Penicillium* species. *Not Sci Biol* [Internet]. 2019 [citado el 10 de abril de 2022];11(4):410–6. Disponible en: <https://www.notulaebiologicae.ro/index.php/nsb/article/view/10581>
26. Foght JM, Gutnick DL, Westlake DW. Effect of emulsan on biodegradation of crude oil by pure and mixed bacterial cultures. *Appl Environ Microbiol* [Internet]. 1989;55(1):36–42. Disponible en: <http://dx.doi.org/10.1128/aem.55.1.36-42.1989>
27. Assadi A, Alimoradzadeh R, Movahedyan H, Amin MM. Intensified 4-chlorophenol biodegradation in an aerobic sequencing batch reactor: Microbial and kinetic properties evaluation. *Environ technol innov* [Internet]. 2021;21(101243):101243. Disponible en: <https://www.sciencedirect.com/science/article/pii/S2352186420315431>
28. Kinsley C, Nicell JA. Treatment of aqueous phenol with soybean peroxidase in the presence of polyethylene glycol. *Bioresour Technol* [Internet]. 2000;73(2):139–46. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0960852499001510>
29. Sánchez Lavado F. Tratamientos combinados físico-químicos y de oxidación para la depuración de aguas residuales de la industria corchera. Universidad de Extremadura. Servicio de Publicaciones; 2008.
30. Salvatella P, Prat C, Roselló J, Anticó E. Chloroanisoles and other chlorinated compounds in cork from different geographical areas. *Toxics* [Internet]. 2019 [citado el 10 de abril de 2022];7(4):49. Disponible en: <https://www.mdpi.com/2305-6304/7/4/49>
31. Busca G, Berardinelli S, Resini C, Arrighi L. Technologies for the removal of phenol from fluid streams: a short review of recent developments. *J Hazard Mater* [Internet]. 2008;160(2–3):265–88. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0304389408004172>
32. Srivastava V, Srivastava T, Kumar MS. Fate of the persistent organic pollutant (POP) Hexachlorocyclohexane (HCH) and remediation challenges. *Int Biodeterior Biodegradation* [Internet]. 2019;140:43–56. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0964830518312447>
33. Prasannamedha G, Kumar PS. A review on contamination and removal of sulfamethoxazole from aqueous solution using cleaner techniques: Present and future perspective. *J Clean Prod* [Internet]. 2020;250(119553):119553. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0959652619344233>
34. Sharma J, Goutam J, Dhuriya YK, Sharma D. Bioremediation of Industrial Pollutants. En: *Microbial Rejuvenation of Polluted Environment*. Singapore: Springer Singapore; 2021. p. 1–31.

35. Wu P, Zhang Z, Luo Y, Bai Y, Fan J. Bioremediation of phenolic pollutants by algae - current status and challenges. *Bioresour Technol* [Internet]. 2022;350(126930):126930. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0960852422002590>
36. Wang J, Li L, Cao H, Yang C, Guo Z, Shi Y, et al. Degradation of phenolic compounds by dielectric barrier plasma: Process optimization and influence of phenol substituents. *Chem Eng J* [Internet]. 2020;385(123732):123732. Disponible en: <https://www.sciencedirect.com/science/article/pii/S138589471933147X>
37. Preda VG, Săndulescu O. Communication is the key: biofilms, quorum sensing, formation and prevention. *Discoveries (Craiova)* [Internet]. 2019 [citado el 10 de abril de 2022];7(3): e100. Disponible en: <http://dx.doi.org/10.15190/d.2019.13>
38. Herrero M, Sánchez-Camargo A del P, Cifuentes A, Ibáñez E. Plants, seaweeds, microalgae and food by-products as natural sources of functional ingredients obtained using pressurized liquid extraction and supercritical fluid extraction. *Trends Analyt Chem* [Internet]. 2015;71:26–38. Disponible en: <https://www.sciencedirect.com/science/article/pii/S0165993615001326>
39. Datta S, Veena R, Samuel MS, Selvarajan E. Immobilization of laccases and applications for the detection and remediation of pollutants: a review. *Environ Chem Lett* [Internet]. 2021;19(1):521–38. Disponible en: <http://dx.doi.org/10.1007/s10311-020-01081-y>